

WIPER MOTOR | W38


Installation Instructions

Before installation please read these instructions.



- 2 Speed, self-parking
- Heavy Duty motor, 38Nm
- Wipershaft in stainless steel
- Various sweep angle: 45 110°
- Dynamic park circiut
- Internal thermoswitch
- Insulated ground
- EMC protected
- Powers up to 900mm/900mm Arm/blade combinations

<u>Instructions - Adjusting the sweep angle and parking position</u>

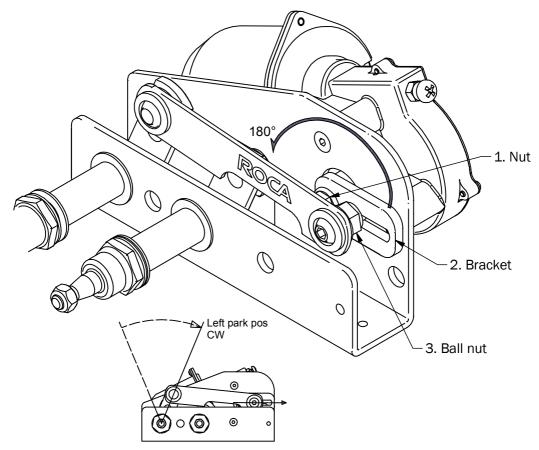

Changing the parking position.

Before the parking position is changed, the wiper motor should be in parked position (Default is set to left).

Keep battery main switch turned off during any operation inside of the wiper motor.

- Loosen the nut (1).
- Remove the bracket (2) and rotate it 180°.
- Assemble the bracket and tighten the nut firmly.

Change of wiped angle.


The wiped angle can be set at any point between 45° and 110°. (Default is set to 45°).


Keep battery main switch turned off during any operation inside of the wiper motor.


- Loosen the ball/nut (3).


(Note: the ball/nut is left threaded to prevent it from coming loose when running).


- Move the ball/nut to desired angle position and tighten it firmly.

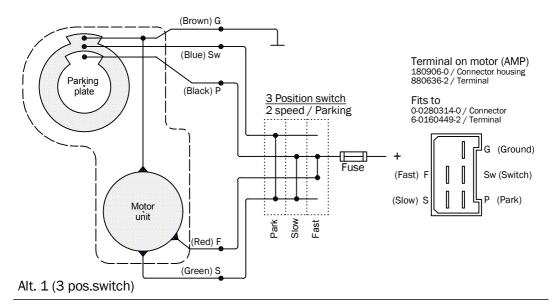

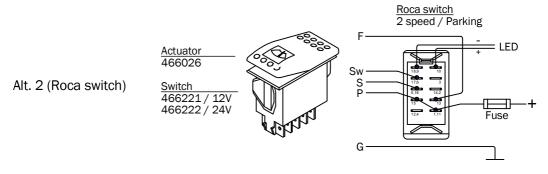

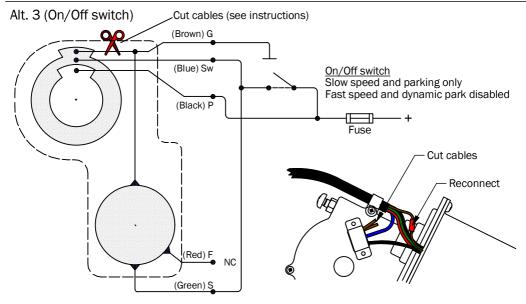

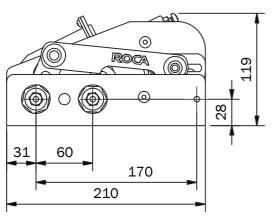



Variations:

iviax ierigiri.		vollage ilipul.	
<u>L1</u>	L2	12 V	24 V
28	78	531011	531012
53	103	531021	531022
78	128	531031	531032

Valtage input

Current diagram:	12 V	24 V
No load	< 3 A	< 2A
Normal running	< 7A	< 4 A
Stall	< 36 A	< 18 A
Fuse	35 A	20 A

Limited warranty

- Roca warrants the wiper motors to be free from defective material and workmanship for a period of 3 years from the date of purchase.
- This warranty does not apply to failure or damage caused by improper installation, misuse, lightning strike or damage from a power surge.
- If failure occurs during this period, return it to your dealer for repair or replacement.

Wiper arms and blades:



Pantograph 536335 EP 538335 Black



Blade (22"-35") 520822 - 35